

- Bending/Shear beam load cell
- 3000 divisions OIML R60 class C
- Hermetically sealed laser welded
- Protected against corrosion by nickel plated treatment
- Measurement element from alloy steel
- Stainless steel version not certified
- Protected against humidity IP68 (EN60529)

\*certified from 300 to 1500 kgs




OIML Certificate No. R60/2000-ES-99.01

### Technical Data




Accuracy Class	C3
Nominal Sensitivity	2mV/V±0.1%
Vmin	8500
Maximum combined error	0.02% N.L
Range of excitation	5..15V
Input Resistance	386 ± 5Ω
Output Resistance	350 ± 5Ω
Temperature limits OIML R60	-10..40°C
Insulation Resistance	>5000MΩ
Cable length	4m

### Mechanical Drawing

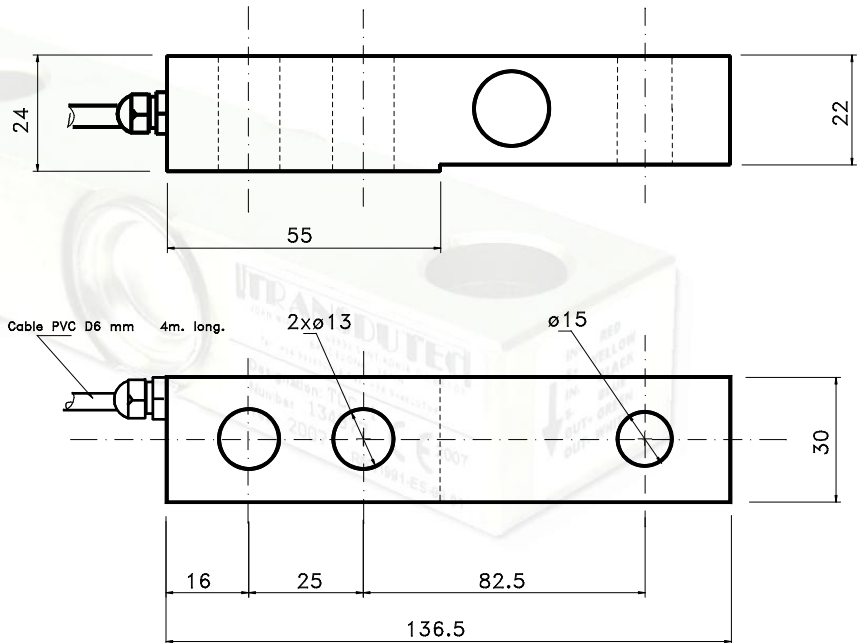

### Electrical connection

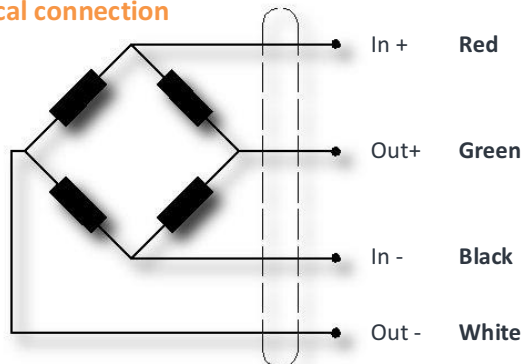

transdutec, s.a

cl. joan miro 11

08930 Sant Adrià de Besòs - Barcelona  
Spain

Telf.0034 93 381 00 04

Fax. 0034 93 462 05 99

<http://www.transdutec.com>

e-mail: [transdutec@transdutec.com](mailto:transdutec@transdutec.com)